

DPT100: single phase

single-function transducers

compact, long range
site configurable transducers



Accurate
class 0.2, 0.5 & 1



USB
programming



Response time
range is 100-220 ms



Compact size

DPT100 is a range of compact, configurable single measurand transducers designed to meet the demanding needs of supply utilities and industrial applications. It offers accurate true-RMS measurements for high efficiency and quick response time. It is equipped with two load-independent, galvanically-isolated analogue outputs that can be configured for desired input range and output curves.

- Best in class response time
- Long range, site-configurable inputs and outputs
- Load-independent accuracy on all outputs
- Diagnostic LEDs
- Compact footprint

System	Measurement functions (Measurands)	Output type	Output range	No. of outputs	Accuracy class
AC	Voltage, current, frequency, active power	Option for mA or V	0-20 mA, 4-20 mA, 0-10 mA, 0-5 mA* 0-2 mA*, 0-1 mA**, 0-5 V, 0-10 V	2	0.2, 0.5, 1.0
DC	Voltage, current	Option for mA or V	0-20 mA, 4-20 mA, 0-10 mA, 0-5 mA* 0-2mA*, 0-1 mA**, 0-5 V [#] , 0-10 V [#]	2	0.2, 0.5, 1.0

*available in accuracy class 0.5 and 1.0

**available in accuracy class 1.0


[#]Available with DC Voltage function only

DPT100: single phase


DPT100 single-function transducers

Output cuves


Curve A
Linear

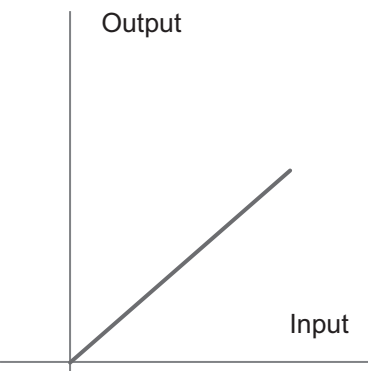


Curve B
Linear with live zero

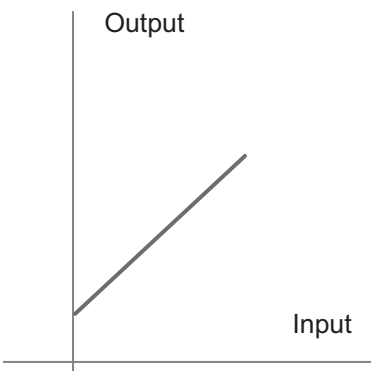


Curve F
Compressed upper region

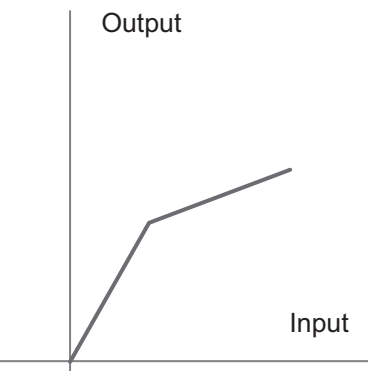

Curve F
Compressed lower region

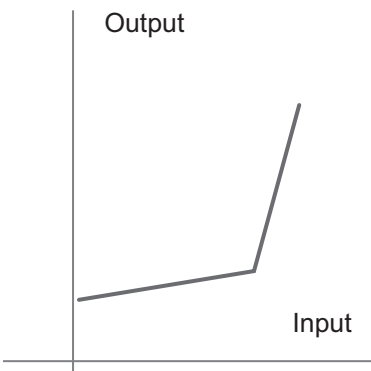

Mechanical dimensions

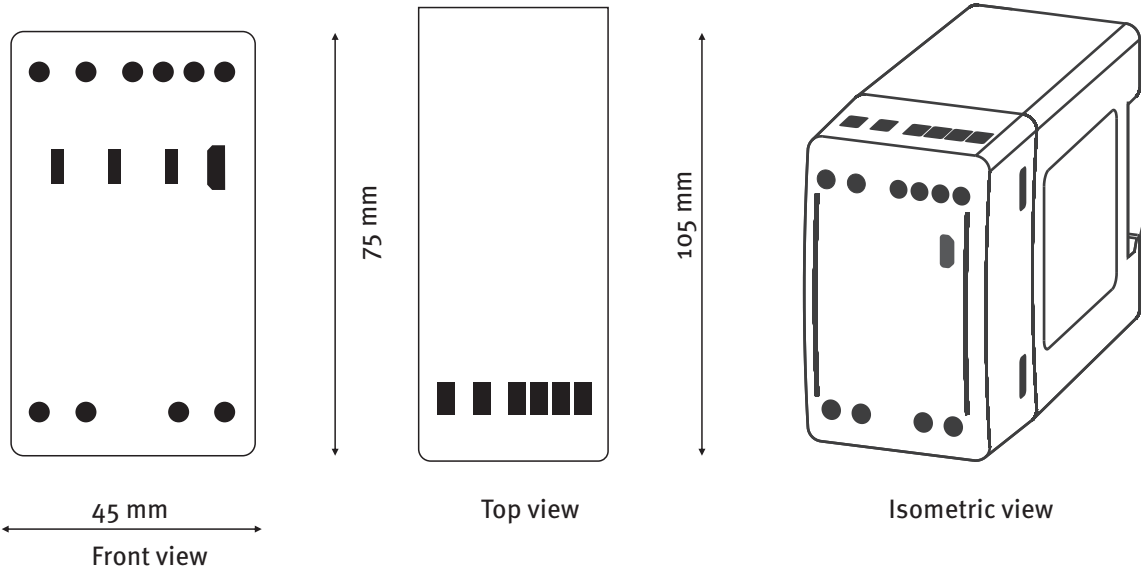

DPT100: single phase

Technical specifications

Variant-wise technical specifications

AC/DC voltage

Nominal input (U_n)	57.7 to 415 V
Measuring range	0 to 130 % U_n (up to 500 V)
Measurement frequency	50/60 Hz ($\pm 5\%$)
Burden	≤ 0.2 VA
Maximum overload voltage	1.3 x U_n continuously (500 V max.) 2 x U_n for 1 s, with up to 10 repetitions at 10 s intervals

For self-powered variant (AC/DC Voltage)

Measurement range	80 to 276 V AC/DC
Measurement range	0 to 110% U_n
Burden	≤ 6 VA, 3W with one output at 750 Ω ≤ 7 VA, 3.5W with two outputs at 750 Ω each

AC current

Nominal input (I_n)	1/5 A
Measuring current range	0 to 150% I_n
Scale factor	0.6 to 1.5 of I_n
Burden	≤ 0.2 VA
Maximum overload current	2 x I_n continuously 20 x I_n for 1 s, with up to 10 repetitions at 100 s intervals

DC current

Measurement input range	0-20 mA directly, or 0-300 mV through shunt
-------------------------	---

Frequency

Nominal input voltage (U_n)	57.7 to 415 V
Input range	0 to 130% U_n (up to 500 V)
Measurement range	45 Hz to 55 Hz, or 55 Hz to 65 Hz
Accuracy	$\pm 0.2\%$

Active Power

Nominal input voltage (U_n)	57.7 to 415 V
Input voltage range	0 to 130 % U_n (up to 500 V)
Nominal input current (I_n)	1/5 A
Input current range	0 to 150% I_n
Measurement frequency	50/60 Hz ($\pm 5\%$)
Scale factor	0.5 to 1.5 of $U_n \times I_n$ (at unity power factor)

Auxiliary Supply

High auxiliary

Nominal voltage range	80-276 V AC/DC ($\pm 10\%$)
Frequency	50/60 Hz
Maximum burden	≤ 6 VA, 3W with one output at 750 Ω ≤ 7 VA, 3.5W with two outputs at 750 Ω each

Low auxiliary

Nominal voltage range	24-80 V DC ($\pm 10\%$)
Maximum burden	≤ 3 W with one output, ≤ 4 W with two outputs

Self-powered (only for voltage transducers)

Nominal voltage range	80-276 V AC/DC
Maximum burden	≤ 6 VA, 3W with one output at 750 Ω ≤ 7 VA, 3.5W with two outputs at 750 Ω each

DPT100: single phase

Technical specifications

Analogue outputs

Type	mA or V, uni-polar
Maximum load resistance	≤750 Ω for 20 mA, ≥2 kΩ for 10 (for each output)
Response time	5 cycles measurement (≤100-220 ms)
Ripple	≤0.4 % peak to peak

Temperature range

Operating range	-5 °C to +55 °C
Functional range	-20 °C to +70 °C
Usage group	1

Mechanical

Dimension (W x H x D)	45 x 75 x 105 mm
Weight	0.4 kg (approx.)
Material	Fire-retardant polycarbonate (PC-FR), UL94 V-0
Mounting	DIN (EN 50022)
Connector type	Screw terminals
Conductor size for terminals	≤4 mm ²

Environmental

Protection class	II (double insulation) EN 61010-1
Pollution degree	2
Installation category	CATIII
Protection degree	Protection housing IP 40, terminals IP 20

Standards compliance

Standards	IEC 60688, IEC 61010-1, IEC 61010-2-30, IEC 61326-1, DIN 50022
-----------	--

Communication ports

Micro USB	for on-site configuration can be configured without auxiliary power
-----------	--

Configuration software tool

ConfigView	For on-site configuration of measurement inputs, measurands, output curve and online parameter reading. It can be freely downloaded from www.ceweinstruments.se
------------	---

Ordering key

DPT XXX-1YY

Example

DPT 611-126
where high auxiliary (6),
mA output (1), accuracy class 0.2,
function (6)

X	X	X	-	1	Y	Y
Aux supply	Output	HW Configuration			Accuracy	Function
6: High	1: mA [#]	1: Default**			1: Cl 1.0	1: Voltage AC/DC
7: Low	2: V	2: DC Current			2 ¹ : Cl 0.2	2: Current DC [#]
8: Self Powered*					5: Cl 0.5	3: Frequency
						5: Current AC
						6: Active Power

*Self powered is voltage transducer only.

** Default means AC/DC voltage, AC current

#Current DC available only in DC Current and mA output



Box 1006 | SE-611 29 Nyköping | Sweden | Tel: +46 (0)155 775 00 | E: info@ceweinstrument.se | Fax: +46 (0)155 775 97 | www.ceweinstrument.se

Cewe Instrument AB

UK Channel Partner

Secure House, Moorside Road, Winchester, Hampshire, SO23 7RX, England | T: +44 (0) 1962 840048 | F: +44 (0) 1962 841046
E: sales_uk@securemeters.com | www.securemeters.com

04-17 Ver 1.1